


1 Set Your Network Up

Update your NEXO devices and their remote control cards with the latest firmware version.

Set up secured and robust Wi-Fi access points, with a unique DHCP server.

***NXES104 only:** Install AVS-Monitor on a computer with Windows (PC, or Mac with virtual machine). Open AVS-Control panel and turn on AVS-Service.

To restrain access to your network, set up users with limited rights in AVS-Service.

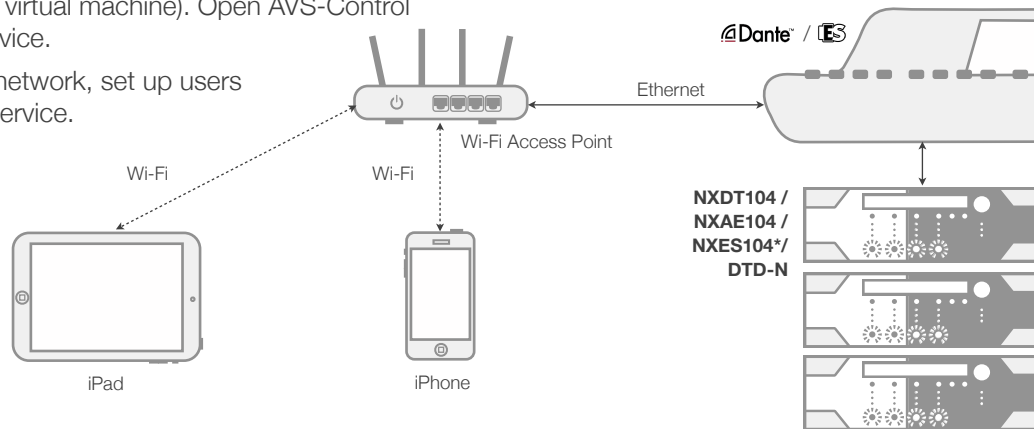


2 Import a Session

A session is a .nemo file that contains all the devices' data, and groups and zones. If you prepared one in another NeMo, import it!

Activate AirDrop. From a Mac, go to the Finder's AirDrop section, and drag a session onto the right iOS device.

Or from another iOS device, press [Session], and select a session. Edit name and description, and tap on [Export]. Choose AirDrop.

Accept the drop on your NeMo for iOS, and here you are!

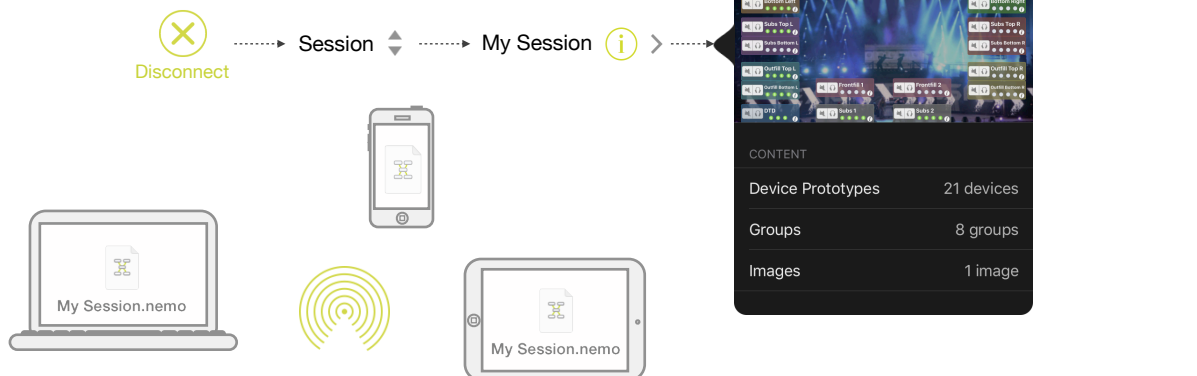

3 Connect and Arrange

Choose Direct Control and/or AVS-Service Connection (in case of EtherSound or large number of devices).

Choose the session to open in NeMo and press [Config].

In the Network Tab, name and place your devices.

Create groups.


Take a picture and add it to the background.

Your session is automatically saved while using NeMo.



Select type of connection
 Select a session
 Press Config

Manage and select groups (grouping of devices), zones (grouping of channels), and devices

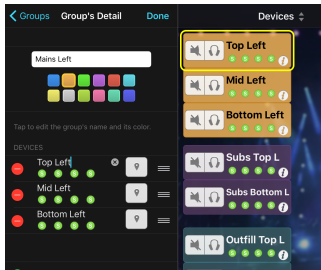

View devices, groups or zones
 Add and edit groups and zones
 Edit background (add pictures)
 Status of NXAMP's 4 channels
 Tap to reveal Dante ID
 Tap to view detail about a device (load, setup, mac, alias edition)

4 Choose Presets

From the Network tab or the Groups & Devices menu, select devices or groups.

Go to the Setup tab.

Build and recall presets.



Select devices, groups or zones

Standard or custom setups
 Scroll to pick series, cabinet, cabinet mode and XO mode
 Recall the selected setups
 Tap to bridge if needed

Go to the Setup tab

5 Edit Your Devices' Settings and EQ



Go to the Control tab.
 Patch inputs to processing channels.
 Edit gain, delay, etc. on:
 - One channel,
 - Several channels, absolute or relative.
 Mute and solo (NXAMP only).
 Add and edit up to 8 EQ bands per channel.



Tap on one or several channels to edit them.



Edit one channel, or select the checkbox of several channels.



Orange = "multiple values"
 If a parameter (e.g. gain ch.1) is not the same for all the selected devices.

Smart slider: displays marks for all the different values.


Annotations for the screenshot:

- Select devices, groups or zones
- Drag your finger to patch, cross a link to clear it
- Always check what is selected
- Absolute or relative
- Edit parameters for the channel 1 of the selected NXAMPs
- Tap to set the EQ of the channel ON or OFF
- Tap to edit the EQ
- Slide your finger or type a value
- Go to the Control tab


6 Save or recall a scene

NXAMP only

Select devices or groups.
 Go to the Scene tab.
 Select a slot and save the scene.
 Later, you will be able to recall this scene and/or paste it to other NXAMPs.

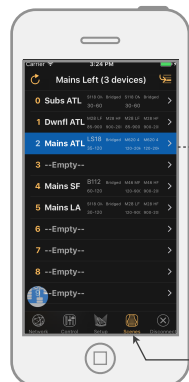

Go to the Scene tab

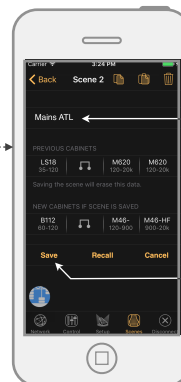


Type a name


Press [Save], and when later you will need the scene, press [Recall]

7 Check up your system

Go to the Network tab and display the map of the group.
 On a group, press [xx devices].
 Check every channel by soloing it.






Navigate through the groups

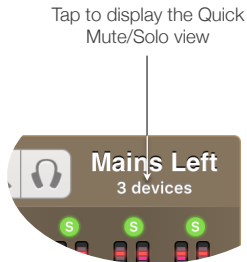

8 Set up alerts and record the log


Go to the preferences.
 In Configure Alerts, choose the alerts to show in the Events menu.
 In Configure Red Alerts, activate and set up alerts to show as pop-up messages.
 To record the log, connect, go to the Log View, choose a Log Record, and press [R].

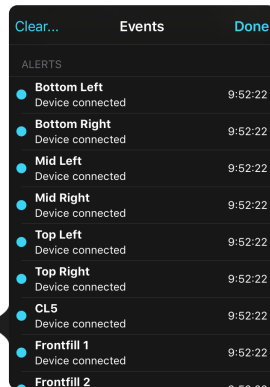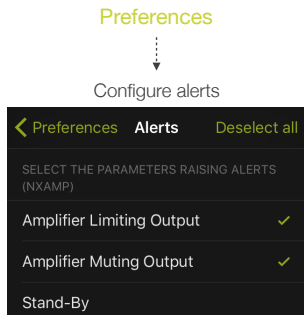

To consult the Events menu:



To go to the Log view:

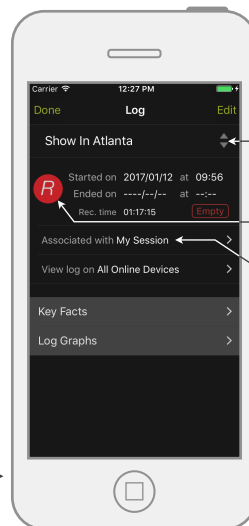

Create if needed and select a Log Record

Tap to start recording

Associate the Log Record with your session

From the welcome view: press [Live]



From the Config mode: press and hold



9

Let the show begin

Connect to the Live mode. Components are disabled. You can go to the Preferences to configure the Live mode.


While the show is ongoing, you can go to the quick mute/solo view (in the Network tab, map of the groups, cell for All devices, press [xx devices]) with VU-Meters, or to the Log view.

When the show is over, go to the Log view and press [R] to stop recording.

Tap to reveal VU-meters



Components are disabled



10

Check-out the log

Go to the Preferences, select View log.


Select devices, and review the key facts and the history of the parameters of your choosing.

Export the log to process it in a spreadsheet.



Plug your iDevice, go to iTunes>Your iDevice>Apps>File Sharing

NEXO Nemo Documents



Open Log Records menu and press [R] to export

Tap to stop recording

Scroll through time. Zoom with two fingers on the cursor, or on a graph.

Maximum
Average
Minimum



Choose devices or groups

Choose parameters

Tap on a curve to display detail. Drag your finger along the curve.

Thanks for downloading and using NeMo! Please refer to the manual for further instructions and tips on how to use NeMo: <https://nexo-sa.com/products/nemo/>. Your feedback and comments are most welcome: technical@nexo.fr. Rate the app! <http://appstore.com/nexosa>.

© 2017 NEXO SA. All rights reserved. www.nexo-sa.com. NEXO SA cannot be held responsible for damages caused by improper use of the devices, this software and its manual. The practices contained herein may not apply to every situation.

Apple, iPod Touch, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries EtherSound and EtherSound logo are trademarks or registered trademarks of Digigram S.A. Dante and Dante logo are trademarks of Audinate Pty Ltd. Wi-Fi is a registered trademark of Wi-Fi Alliance. Windows is a registered trademark of Microsoft Corporation. All other trademarks are the property of their owners.